


ION Electricals Pvt. Ltd.

Quiz Buzzer System

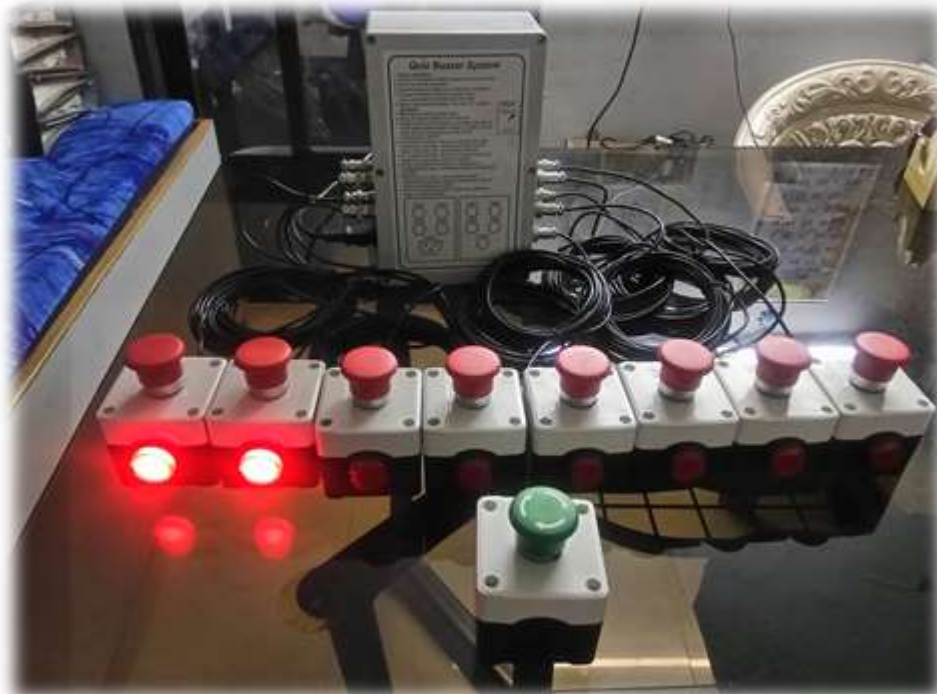

Quick Installation-

1. Connect contestant button boxes to any input from
2. Cont1 to Cont8 Connector
3. Connect Anchor Button box to Anchor connector
4. Connect 230vAC (+/- 10%) to power input
(Use only-cables provided with this unit)
5. Select operational scheme 3-winner or 1 winner

Operation-

1. Start the unit (give long beep)
2. Press Anchor's switch to start the test

3. System gives 3 quick beeps and Starts the quiz (if contestant presses button before 3 beeps, his red lamp will turn on and buzzer will sound continuously, FAULT)
4. In 3-winner scheme, whoever presses first gets continuous red lamp, second gets flashing red lamp, third gets very low flashing red lamp.
5. In 1- winner scheme, whoever presses first will get continuous red lamp. Rest are ignored.
6. Every contestant's first press in that cycle is recognized by beep, subsequent button presses are ignored.
7. There can be one in million chance for two contestants pressing exactly at same time, both of them are declared as winner.
8. Anchor releasing the green switch (by rotating it) stops or resets the quiz.